


UTP 케이블

Unshielded Twisted Pair Category 3 (4Pr/100Pr)

• 품명 (Product Name)

- Unshielded Twisted Pair Category 3
- CM, CMR, CMP

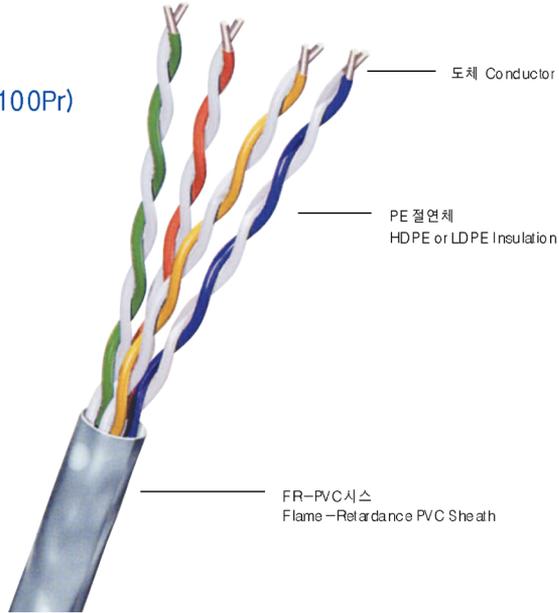

• 구조 (Construction)

종류 Model	도체 Conductor	절연 Insulation	시스 Sheath
CM/CMR	연동선 (Annealed copper wire) 0.511(AWG24)	HDPE	FR-PVC
CMP	연동선 (Annealed copper wire) 0.511(AWG24)	TEFLON	LS-PVC

종류 Model	구분(Pr) Division	절연외경 (mm) Overall Diameter	외경 (mm) Diameter	중량(kg/m) Weight	포장 Package
CM/CMR	4	0.90	4.8	10	Box
CMP	4	0.88	4.8	10	Box

- 도체 (Conductor) : 연동선 (Annealed copper wire) 0.511 (AWG 24)
- 시스 (Sheath) : FR-PVC
- 절연 (Insulation) : Foamed HDPE + FR - PE skin

구분(Pr) Division	절연외경 (mm) Overall Diameter	외경 (mm) Diameter	1중량(kg/305m) Weight	포장 Package
25	0.86	10.5	75	Reel
50	0.86	14.0	140	Reel
75	0.86	17.0	220	Reel
100	0.86	20.5	275	Reel
200	0.86	26.5	520	Reel
300	0.86	31.0	750	Reel
400	0.86	36.0	1010	Reel
600	0.86	44.5	1400	Reel

• 사용용도 (Typical Use)

- 옥내 수평 및 간선 배선망 (16MHz)
(Indoor horizontal power line and trunk line network)